# 1-23911-K069

## FireBeta XT Extinguishing Control Panel (3 Zone / 1 Area)

### General

FireBeta XT extinguishing control panels are designed and manufactured to the highest standards in a quality controlled environment. With it's EN12094-1 approvals it offers outstanding value and performance for small to medium sized fixed firefighting installations. The FireBeta XT is supplied in an enclosure that matches the design and colour of the status unit range.

The 3 detection zone circuits allow extinguishing agent release to be configured to activate from any combination of detection zones. This allows (among others) any 2 zones from the combination of 3 to activate release, making it ideal for applications protecting ceiling, room and floor voids.

The extensive configuration options of the FireBeta XT allow the functionality of the system to be extensively modified to suit the application while still complying with EN12094-1, EN54-2 and EN54-4. A large LED display on the panel fascia enables easy configuration and control. It additionally displays the time remaining until extinguishing agent release for added user safety.


The control panel status can be displayed on up to 7 remote status indicators. This allows the agent release status to be displayed at, for e.g. multiple entrances to a protected area, adding additional user safety. The communication between the panel and its status indicators is fully monitored.

The internal electronics are mounted on a single, easily removable steel plate making the FireBeta XT robust and easy to install.

### Programmable functions

Access level 2:
- Test zones 1 to 3
- Disable zones 1 to 3
- Disable 1st stage alarms
- Disable pre-activated 1st stage relay
- Disable pre-activated 2nd stage relay
- Disable extract fan output
- Disable manual release input
- Disable extinguishant sub system
- Activate extract fan output
- Activate alarm delays

Access level 3:
- Sounder delay
- Coincidence detection
- Disable panel features
- Zone alarm delays (detectors)
- Zone alarm delays (manual call points)
- Configure zone for I.S. barrier use
- Zone short circuit alarm
- Zone non latching
- Zone inputs delay

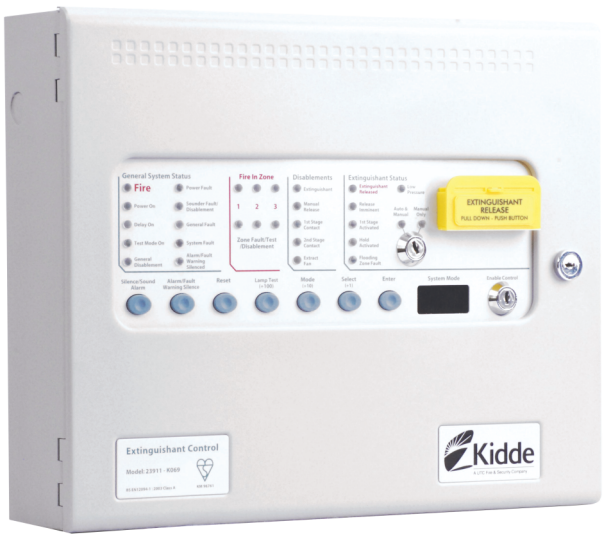


### Details

- EN12094-1, EN54-2 and EN54-4 approved
- Three detection zones as standard
- Any single zone or any combinations of zones can be configured to release
- Configurable first stage sounder delays
- Configurable detection delays
- Zero time delay for manual release option
- Compatible with I.S. barriers
- Non-latching zone input option to receive signals from other systems e.g. aspiration systems
- Configurable extinguishing agent delays up to 60 seconds in 5 second steps
- Countdown timer shows time remaining until release
- Supports up to seven, four wire status indicators
- Built in extract fan control

- Extinguishant release time delay
- Extinguishant release duration timer
- Extinguishant reset delay timer

# 1-23911-K069

## FireBeta XT Extinguishing Control Panel (3 Zone / 1 Area)

## Technical specifications

### General

| | |
|---|---|
| Status indicaton | LEDs |
| Compatibility | Status unit/Ancillary board connection |
| Connectivity | Two wire RS485 |
| Communication ports | 1 |
| Maximum system capacity (device count) | up to 96 |
| Network size (nodes) | fino a 8 |

### Electrical

| | |
|---|---|
| Power supply type | 230 VAC |
| Power consumption | 100 W (max) |
| Operating voltage | 28 VDC ±2 V |
| Current consumption | 0.095 A |
| Mains supply fuse | 1.6 A |
| Power supply rating | 3 A |
| Maximum ripple | 200 mV |

### Zone

| | |
|---|---|
| Maximum zone capacity | fino a 3 |
| Quantity of devices per zone | 32 (max) type dependent |
| Cable rating | 0.5 mm² to 2.5 mm² solid or stranded wire, FP200 or equivalent |
| Quiescent current | 2 mA (max.) |
| Termination | 6k8 ½ W |
| Thresholds | Normal, 8 to 1 kΩ |
| Thresholds | Detector alarm, 999 to 400 Ω |
| Thresholds | Manual call point alarm, 399 to 100 Ω |
| Thresholds | Short circuit, 99 to 0 Ω |

### Input

| | |
|---|---|
| Input quantity | 4 |
| Input type and rating | SIL, AL, FLT, RST switched -ve 100 Ω |
| Programmable | Yes |
| Termination | 6k8 ½ W |
| Thresholds | Normal, 8 to 1 kΩ |
| Thresholds | Alarm, 999 to 100 Ω |
| Thresholds | Short circuit, 99 to 0 Ω |

### Output

| | |
|---|---|
| Output quantity | 13 |
| Output type and rating | Output specific |
| Fire alarm signalling | 1 A @ 30 VDC |
| Fault signalling | 1 A @ 30 VDC |
| Notification | 500 mA @ 24 V |
| Auxilliary power | 500 mA @ 24 V |
| Termination | Output specific |
| Output type and rating | Local fire relay, 1 A @ 30 VDC |
| Output type and rating | 1st stage relay, 1 A @ 30 VDC |
| Output type and rating | 2nd stage relay, 1 A @ 30 VDC |
| Output type and rating | Extract fan, 1 A @ 30 VDC |
| Output type and rating | Extinguishing release, 1A |
| Extinguishing release delay | 0 to 60 s (5 s steps) |
| Extinguishing release duration | 60 to 300 s (5 s steps) |
| Termination | Notification, 10 K ¼ W |
| Termination | Extinguishing, 1N4004 |

### Standby battery

| | |
|---|---|
| Capacity | 2 x 12 V, 7 Ah |
| Charging | 0.7 A @ 27.6 VDC (temperature compensated) |
| Batteries supported in housing | 2 |
| Type | Yuasa NP SLA |
| Battery fuse | 3.15 A |
| Battery current | 3 A (max.) |

### Physical

| | |
|---|---|
| Form factor | Vægmontering |
| Physical dimensions | 385 x 310 x 90 mm |
| Net weight | 6 kg |
| Colour | Grå |
| Mounting type | Vægmontering |
| Material | Mild sheet steel (1.2 mm) |
| Finish | Epoxy powder coated |
| Terminal capacity | 12 AWG |

### Environmental


| | |
|---|---|
| Vandal proof | No |
| Environment | Indendør |
| IP rating | IP30 |

### Regulatory

| | |
|---|---|
| Compliancy | REACH, RoHS 2, WEEE |
| Certification | EN12094-1, EN54-2, EN54-4 |

# 1-23911-K069

## FireBeta XT Extinguishing Control Panel (3 Zone / 1 Area)

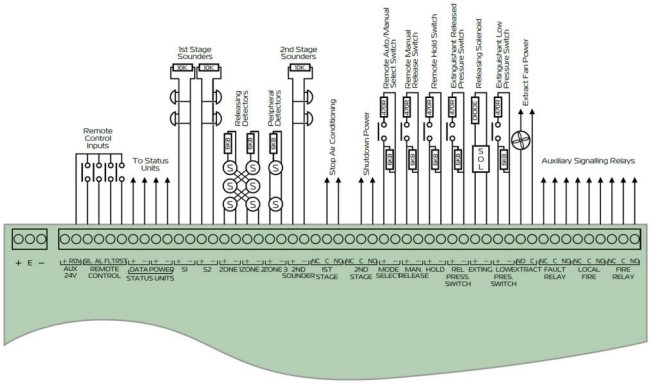


KIDDE GLOBAL SOLUTIONS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 26 March 2024 - 15:19