# SC-41-0200-0001-99


## SmartCell Dual Input/Output Device for Fire Zones

### Overview

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

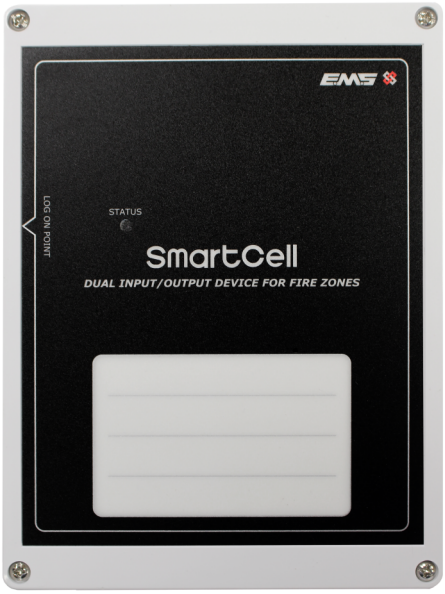


### Details

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

# SC-41-0200-0001-99

## SmartCell Dual Input/Output Device for Fire Zones

## Technical specifications

### General

| | |
|---|---|
| Wireless frequency | 868 MHz |
| Compatibility | SmartCell, Excellence Gateway |

### Input

| | |
|---|---|
| Input quantity | 2 |
| Input type and rating | Resistor monitored inputs |

### Output

| | |
|---|---|
| Output quantity | 2 |
| Output type and rating | Voltage free outputs, rated 1 A at 30 VDC |

### Physical

| | |
|---|---|
| Physical dimensions | 150 x 200 x 55 mm (W x H x D) |
| Net weight | 0.45 kg |
| Mounting type | Vægmontering |
| Batteries | 3 x 3.6 V lithium thionyl chloride batteries<br>Fanso: ER14505M<br>HCB: ER14505M (HCB-JS-TZ-02-547) |

### Environmental

| | |
|---|---|
| Operating temperature | -10 to +55°C |
| Storage temperature | -10 to +30°C (with batteries)<br>-10 to +55°C (without batteries) |
| Relative humidity | 95% noncondensing max. |
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | CE |
| Certification | CPR |
| Standards | EN54-13<br>EN54-18<br>EN54-25 |

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 11 September 2026 - 11:55