# VE1016

**Vector PIR, DSP, 16 m, 9 curtains**



## Details

- Passive Infra Red motion sensor
- 3-Step Gliding Focus Curtain mirror
- Plug-in electronics
- Sealed optics
- "V2E" signal processing for false alarm immunity
- Cloak and umbrella immunity
- Full under crawl detection
- Selectable coverage pattern using mirror masks
- Auto focus with constant range sensitivity
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- EN50131-2-2 Grade 2 certified
- Several European approvals

# VE1016
## Vector PIR, DSP, 16 m, 9 curtains

## Technische specificaties

### General

| | |
|---|---|
| Technology | PIR |
| Application type | Wall mount |
| Anti masking | No |
| Pet immune | No |
| Camera | No |
| Signal processing | Vector Verified Enhanced (VE2) |
| Pry-off tamper kit | ST400 (optional) |

### Detection

| | |
|---|---|
| Max. detection range | 16 m |
| Detection range | 16 m |
| Undercrawl protection | Yes |
| Alarm memory | Yes |
| Alarm time | 3 s |

### Wired/wireless

| | |
|---|---|
| Wired-wireless | Wired |

### Inputs/outputs

| | |
|---|---|
| Relay configuration | Isolated or 4k7 EOL |
| Remote control lines | Day/Night, Walk test |

### Physical


| | |
|---|---|
| Colour | White |
| Mounting height | 1.8 to 3 m |

### Environmental

| | |
|---|---|
| Environment | Indoor |

### Regulatory

| | |
|---|---|
| EN50131 grade | Grade 2 |

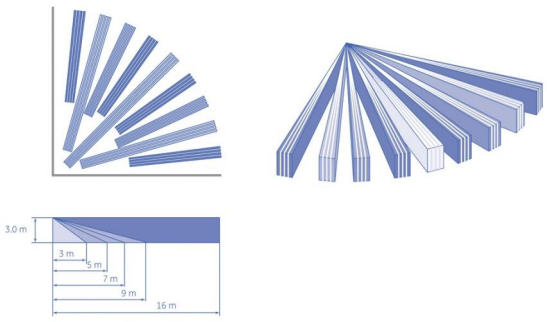


Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57