ASC367

Conventional Ceiling Mount VAD, Multi Tone, Deep Base - Red Flash



ASC367

Conventional Ceiling Mount VAD, Multi Tone, Deep Base - Red Flash

Spécifications techniques

Electrical

Current consumption	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Net weight	215 g
Colour	Rot
Mounting type	Montage auf Sockel
Mounting position	Decke
Mounting base	Tief
Material	Hochschlagfestes Polycarbonat


Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Drinnen, Draussen
IP rating	IP65

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	EN54-23, EN54-3

EN54-23 Coverage: C–3-8.9

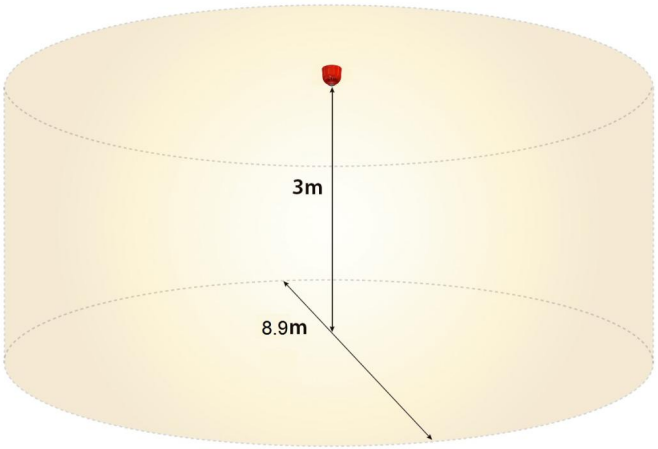

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57