
2010-2-PIB

Addressable Fire Panel Accessory - Peripherals Interface Printed Circuit Board

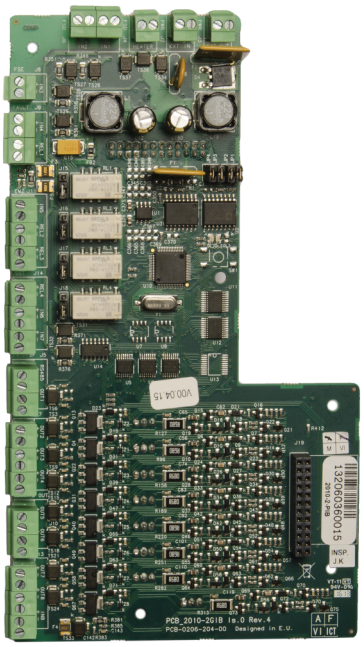

Details

- 8 supervised inputs

2010-2-PIB

Addressable Fire Panel Accessory - Peripherals Interface Printed Circuit Board

Technische specificaties

General

Maximum system capacity (device count)	1 to 32, more than 160K, up to 120K, up to 128, up to 160K, up to 20K, up to 256, up to 4096, up to 512, up to 60K, up to 64, up to 96
Network size (nodes)	1 to 32, more than 128, up to 128, up to 64

Electrical

Power supply type	VDC

Zone

Maximum zone capacity	1 to 64, more than 1024, up to 1024, up to 256

Physical

Form factor	Large
Mounting type	In cabinet

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57