# FAW355WC

## Conventional VAD, Deep Base, Wall Mount - White Flash

### General

The FAW355W is a general purpose wall mount LED beacon for fire alarm applications. It features a special deep base containing all wiring connections and allow for easy removal/placement of the device. With an EN54-23 approved coverage pattern of W-3.1-11.3, each FAW355WC may be mounted up to 3.5m high and cover a square room of 11.3 x 11.3m with a single device.



### Easy and Fast Installation

The FAx350 beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws, these becons use a deep base version of the TimeSaver™ bases from the 630 series detectors. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

### Efficient and versatile

The FAx350 beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area. The flash rate of the beacon may be adjusted during installation, with a selection of 0.5Hz or 1Hz.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the beacon from the base.

### Details

- Automatic syncronisation
- Anti-Tamper locking mechanism
- Deep mouting base
- Wiring directly to base
- Flash rate selectable
- IP65 Ingress protection

# FAW355WC

## Conventional VAD, Deep Base, Wall Mount - White Flash

## Technical specifications

### General

| | |
|---|---|
| Line monitoring | Polarised input |

### Electrical

| | |
|---|---|
| Operating voltage | 17 to 60 VDC |
| Current consumption | 20 mA @ 0.5 Hz / 40 mA @ 1 Hz |

### Sounder

| | |
|---|---|
| Output level | Continuous operation |
| Synchronization | Phased start (Automatic) |

### VAD

| | |
|---|---|
| Colour | White |
| Flash frequency | 0.5 Hz or 1 Hz |

### Physical

| | |
|---|---|
| Physical dimensions | 100 x 104 mm (Ø x D) |
| Net weight | 250 g |
| Colour | Hvid |
| Mounting type | Vægmontering |
| Mounting height | up to 3.1 m |
| Material | Policarbonato alto impatto |

### Environmental

| | |
|---|---|
| Operating temperature | -25 to +70°C |
| Relative humidity | 5 to 95% noncondensing |
| Environment | Indendør, Udendørs |
| IP rating | IP65 |


### Regulatory

| | |
|---|---|
| Certification | EN54-23 |

### EN54-23 rating

| | |
|---|---|
| Light coverage | W-3.1-11.3 |
| Floor coverage | up to 11.3 m x 11.3 m |

EN54-23 Coverage: W-3.5-11.5

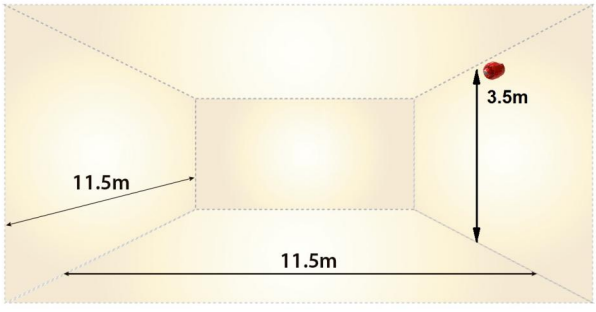


KIDDE GLOBAL SOLUTIONS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 15 October 2026 - 16:43