ASC367

Conventional Ceiling Mount VAD, Multi tone, Deep base - RED with RED flash



Details

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic syncronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Deep mouting base with side cable entry and wiring to the base
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASC367

Conventional Ceiling Mount VAD, Multi tone, Deep base - RED with RED flash

Technische specificaties

Electrical

Stroomverbruik	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Netto gewicht	215 g
Kleur	Rød
Type montage	Montagem na base
Montagepositie	Teto
Montageplaat	Profundo
Materiaal	Alto impacto policarbonato

Environmental

Bedrijfstemperatuur	-25 to +70°C
Relatieve vochtigheid	5 to 95%
Omgeving	Indendør, Udendørs
IP-classificatie	IP65

Regulatory

Conformiteit	CE, REACH, RoHS 3, WEEE
Certificering	EN54-23, EN54-3

EN54-23 Coverage: C–3-8.9

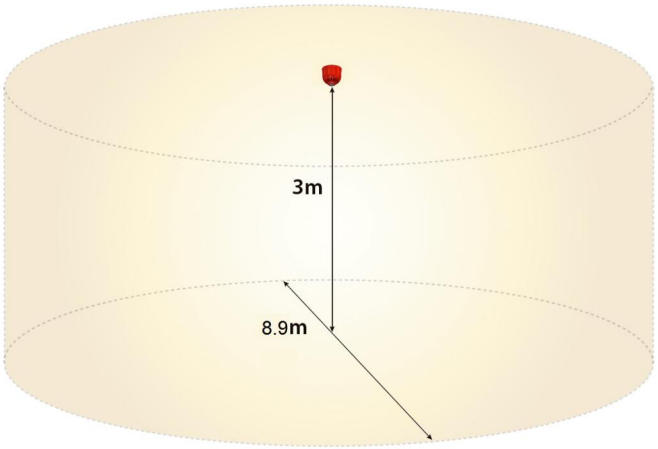

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57